



PeopleLink Multichannel All in One DSP

PeopleLink DSP is the ultimate choice for High Definition Audio signal processor. The most powerful HD audio available, it delivers full continuous presence meetings with Multi Location Voice conferencing over its 4 inputs and 2 output DSP, ideal for local sound reinforcement. Highly scalable and flexible - PeopleLink's Multichannel Console DSP provides HD voice communications platform. This powerful, fault tolerant solution is ideal for the communication needs of large enterprises as well as Service providers looking to offer video conferencing services. Advanced design - This is the most powerful and up to date microphone Mixer, DSP and Amplifier available in the Industry today. It is Compact, Simple and extremely User-friendly allowing you to do Large scale Video Conferencing from a compact audio System.

Product Features

Range	: Wide operating range of 100 feet
Power Supply Safety	: Power Supply Unit with Short Circuit, Overload and Over Voltage Protection
SMT SMT Circuit	: Surface Mount Technology (SMT) Circuit
Efficiency	: High efficiency of ~90%
Current	: Very low quiescent current. Can run on inverter.
Circuit	: Technology (SMT) Circuit Integrated Self-Protection Surface Mount
Frequency lock	: Quartz-locked frequency
Area of application	: Classrooms, Training Rooms
Capacity	: 40 to 60 seater
Chassis	: 19-Inch chassis 1.5U (Rack Mountable) DSP with Inbuilt amplifier with wireless microphone System

Specifications

WIRELESS MICROPHONE SYSTEM

Frequency type	: Quartz locked frequency
Operating Range	: 100 Feet
Microphone Options	: 2 x Handheld/ 1 Handheld +1 Lapel / 2 x Lapel
Frequencies	: 5 non interfering frequencies available
Antennas	: Soft, Flexible rubberised antennas
Output	: Balanced Phoenix and Mixed Unbalanced 1/4" Outputs
LCD Display	: Frequency, Group, Antenna & Channel is displayed on the LCD in the receiver
Gain Control	: Separate gain controls for both the channels
Microphone Frequency Response	: 80 Hz-18KHz
Microphone Type	: UHF

AMPLIFIER

Power output @ 8 ohms	: 2 X50W, Vcc= 24V DC
Minimum impedance	: 8 ohms @50W
Frequency response	: 20 Hz-20,000Hz
Operating supply voltage	: 8 V to 24 V
Type	: Class D (Digital)

DIGITAL SIGNAL PROCESSOR

Frequency Range	: 30 Hz. to 16 KHz.
Automatic Echo Cancellation	: Yes
Automatic Gain Control	: Yes
Dynamic Noise Reduction	: Yes
Noise Supression	: Yes
Full Duplex	: Yes

INTERFACE

Input	: Built-In 1 x Handheld, 1 x Lapel Microphone
Unbalanced MIC input	: 1x 6.5mm phono jack with gain controlle
Balanced 48v/12v phantom MIC inputs	: 1x Phoenix ports with separate gain controller
Line input	: 1 x 2RCA
Line Output	: 1 x 2RCA
USB Interface for PC connectivity	: 1 x USB 2.0
RS-232 for controlling	: 1x RS-232 audio controlling


PeopleLink Multichannel All in One DSP

MISCELLANEOUS

Power Supply Unit (PSU)	: Power Supply Unit with Short Circuit, Overload and Over Voltage Protection
Application	: Classrooms, Training Rooms
Capacity	: 40 to 60 Seater
Shape of the room	: Any

PACKAGING INFORMATION

Components	: 19 inch chassis 1.5U (Rack Mountable) with Inbuilt DSP
Package Includes	: Inbuilt Package Includes People Link Multi Channel Console DSP with built-in Amplifier, Wireless Handheld Microphone, Wireless Lapel Microphone, USB 2.0x1, Cable, Stereo to Microphone, 2 RCA Cable x2, 50W Speakers x2

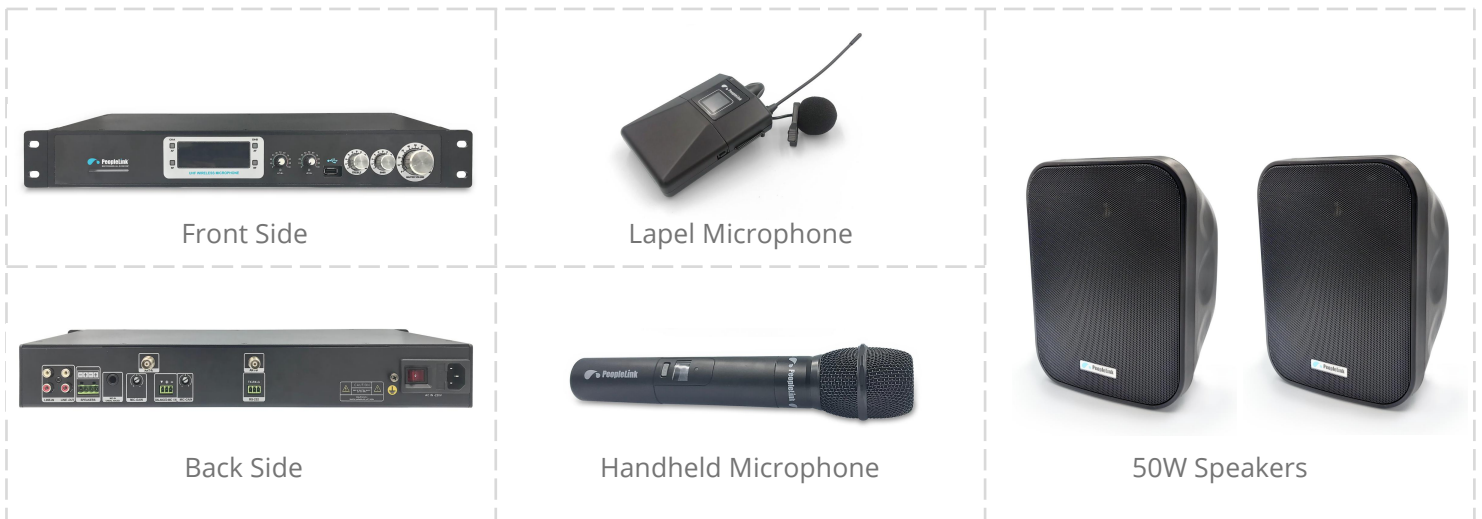

Ordering Information

Part code : PPU-MCC-DSP-AIO

GLOBAL HEADQUARTERS

Q3-A3, 10th Floor, Cyber Towers, Hitech City,
Madhapur, Hyderabad - 500 081 (India)
Phone: +91 (40) 66903959 / 60
Email: vc@peoplelinkvc.com

INTERNATIONAL CONTACT NUMBERS

USA : +1-321-2163070
UK : +44-20-35190197

Africa : +27-10-5001977
Australia: +61-29-0988367

Canada : +1-647-4964195
Middle East : +973-1-6199342

Follow us:  www.peoplelinkvc.com/social-presence

DISCLAIMER: PeopleLink Unified Communications Pvt. Ltd., All rights reserved. All third party trademarks/ products mentioned (if any) are the property of their respective owners. Product Images are for illustration purpose only. Actual product may vary due to product enhancements. All specifications are subject to change without notice; system specifics may vary.

PeopleLink Public Document | PeopleLink Unified Communications Pvt. Ltd. | ISO 9001:2015 & ISO/IEC 27001:2013 Certified Company.