




## PeopleLink Speaker Track Pro

### key Features

- 1/2.8" CMOS, 2.14MP
- 12x optical zoom, up to 72.5° FoV
- Simultaneously output 3G-SDI, HDMI, Ethernet, up to 1080P60 resolution
- Support H.264/H.265 video compression
- Implemented with both audio positioning, body detection and recognition technologies, it can precisely frame the speakers
- Automatically switch between close-up image for speaker(s) and wide-angle image for all attendees
- Built-in image switch rules according to actual meeting scenarios



PeopleLink Speaker Track camera helps to achieve an intelligent meeting experience, implemented with both audio positioning and intelligent video analysis technologies. It can automatically switch between a close-up image and a full-view image to frame the speaker(s). This frees up camera operation during a meeting and enables meeting attendees to focus more on discussion.

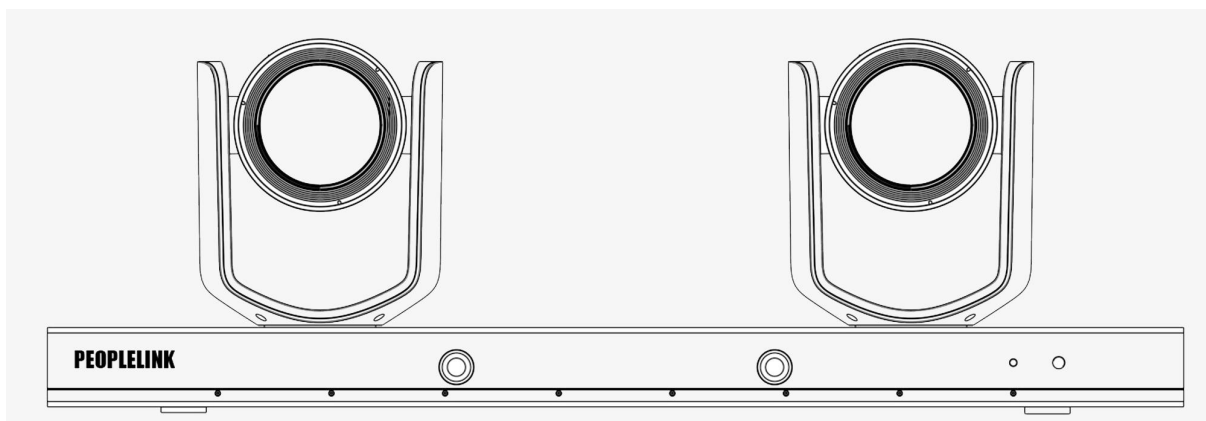

## General Specifications

### Camera:

**Image Sensor** : 1/2.8" CMOS, 2.14MP  
**Signal Format (SDI)** : 1080P60, 1080P50, 1080P30, 1080P25, 1080I60, 1080I50, 720P60, 720P50  
**Focal** : f=3.9mm-46.8mm  
**Iris** : F1.6-F2.8  
**Optical Zoom** : 12x  
**Digital Zoom** : 12x  
**Field of View** : 72.5°-6.3°  
**Focus** : Auto, Manual, PTZ Push, One Push  
**Min. Illumination** : 0.5 Lux (Color), 0.1 Lux (B/W)  
**Shutter Speed** : 1/25-1/10,000s  
**AGC** : Auto/Manual  
**White Balance** : Auto, Indoor, Outdoor, One Push Manual, Auto Track  
**AE Control** : Auto, Manual, Shutter Priority, Iris Priority  
**S/N** : ≥50dB  
**DNR** : 2D/3D  
**BLC** : Support  
**Pan Range** : 90°~+90°  
**Tilt Range** : -30°~+90°  
**Pan Speed** : 0.1°~120°/s  
**Tilt Speed** : 0.1°~80°/s  
**Preset Number** : 256  
**OSD** : Yes  
**Image Flip** : Yes

### Network:

**Max. Image Size** : 1920×1080 @60 fps  
**Video Compression** : H.265,H.264  
**Audio Compression** : AAC  
**Protocol** : HTTP, RTSP, RTMP, RTP, TCP, UDP, ONVIF  
**Dual Stream** : Support

### Interface:




**Video Output** : 1×HDMI Interface, 1×3G-SDI Interface  
**Audio Input** : 2×LINE IN, including one channel with EC  
**Audio Output** : 1×LINE OUT  
**Network Interface** : 1×10M/100M  
**USB Interface** : 1×USB2.0  
**Control Interface** : 1×RS-232

### General:

**Control Protocol** : VISCA, PELCO-P, PELCO-D  
**Address** : 0~63  
**Power Supply** : DC12V  
**Power Consumption** : <50W  
**Working Temp** : 0°C ~ + 40°C  
**Storage Temp** : -20°C ~ +60°C  
**Dimension (LxWxH)** : 500 mm x 162mm x 137mm  
**Weight** : 3kg




## Application Scenarios

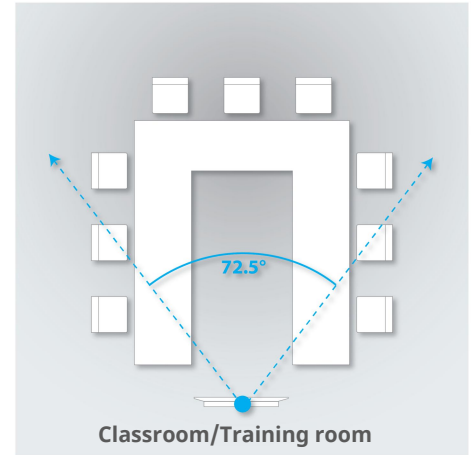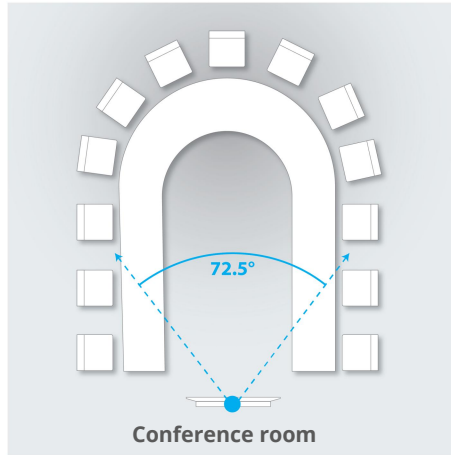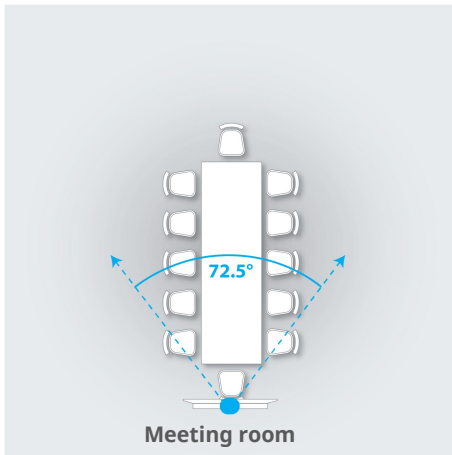

**Disclaimer:-** Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

## Connectivity

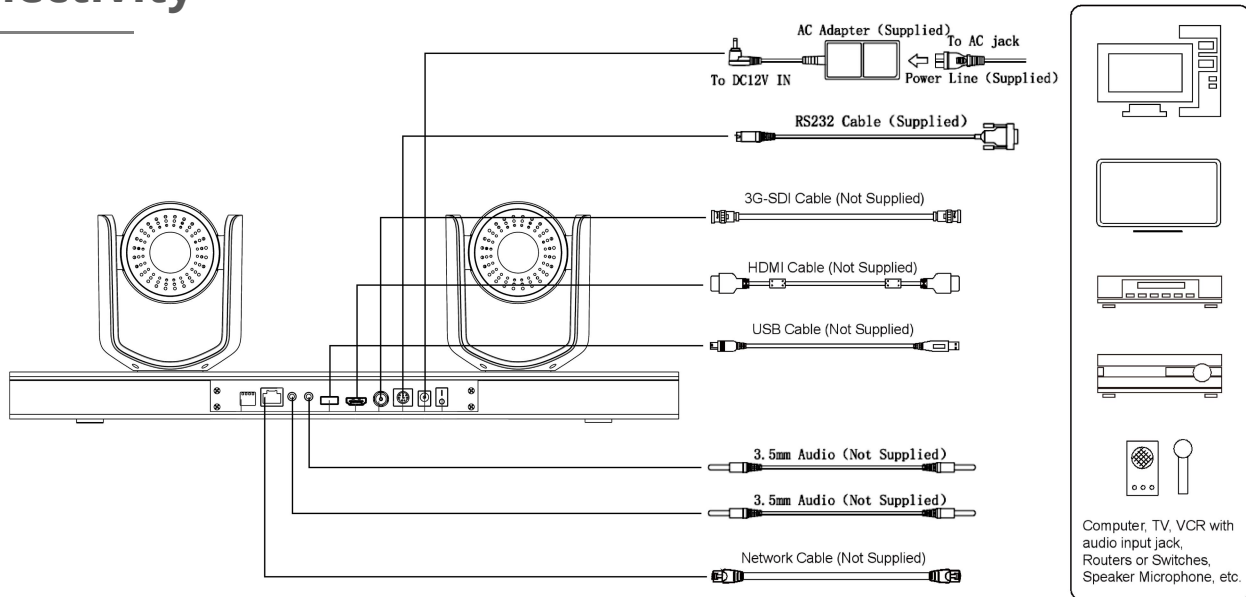

## Ordering Information

Speaker Track Pro Camera  
Dual motorized PTZ Camera with HDMI Capture Card

: **PEP-PIS-STP**

Speaker Track Standard Camera  
Dual motorized PTZ Camera without HDMI Capture Card

: **PEP-PIS-STS**

**LEARN MORE**

For more information on Speaker Track Pro [Click Here](#)

## SALES AND INQUIRIES

### Global Headquarters

Q3-A3, 10th Floor Cyber Towers,  
HITEC City, Hyderabad,  
Telangana 500081, **India**  
Phone: **+91 9100123013**  
Email: **vc@peoplelinkvc.com**

### International Contact Numbers

**USA:** +1 669-696-8383  
**Australia:** +61 370 037070  
**France:** +33 6 80 75 26 42  
**Middle East:** +966 5300 19292  
**UK:** +44 20 4571 5454

### Tech Support

**Toll Free:** 1800 208 3399  
customersupport@peoplelinkvc.com