



V 1.0 - 032024

PeopleLink e-Podium Delta Plus



PeopleLink ePodium Delta Plus delivers unmatched Interactivity among various digital devices with its ergonomic design which allows you to collaborate with your partners, Customers and business associates with technological ease; it provides great productivity benefits due to its modular form factor, achieving easy mobility of the device

Specifications

BODY MATERIAL

Body and Top : Metallic

All doors Lockable : Yes

Top Sliding Mechanism : Yes

Provision for Monitor : Yes

Electronic Monitor Lift : Yes

Document Camera Tray : Yes (Sliding Type)

Door access : Front/Rear

Chassis : Polymer coated CRCA steel sheet

Thickness of enclosure : 1.6mm

CPU (Optional)

Processor : Intel i3 / i5

RAM : 4 GB

HDD : 1TB

Operating System : Windows 10

Keyboard/Mouse : Yes

General Specifications

Tablet Monitor Features

Screen Size : 21.5" wide LED

Resolution : 1920 x 1080

PC Connection : USB Port

Luminosity : 250 cd/m2

Input : DVI, HDMI

Touch : Finger and Stylus with capacitive Touch

Stylus Type : Battery Free Pen

Number of Colours : 16.7M

Response time : 5ms

Contraste ratio : 1000/1

Operating System : Windows, Linux, Mac

Electrical

Input Voltage : DC 12V.

Power : 100 – 250V AC : 100 – 250V AC.

Contents

Accessories : 1.5 Mtrs HDMI Cable x1,
3.5mm Male to Male x 1, USB 2.0 M to M x4.

Laptop Interface

Laptop Interface : Inbuilt

Video Port For laptop : 1x HDMI(4K), 1VGA

Audio Port For Laptop : 1x 3.5mm Stereo Female Port

Buttons: Video Selection buttons x4, Microphone Control Buttons, Volume Control Buttons, projector Control Buttons, Screen up/Down Buttons.

LAN Port : 1x RJ-45

USB 2.0 Ports : 4x USB 2.0 Ports,, 1xUSB (Laptop Touch & DSP), 1xUSB (CPU Touch & DSP)

Power Socket : 3 Pin AC 220 Power Socket

Input / Output Ports : 4x HDMI Inputs, 2x HDMI Outputs

Gooseneck Microphone Features: (Optional)


Cartridge : 20mm Condenser

Frequency Response : 40~20000 Hz.




Polar Pattern and Microphone Type : Cardioids, Polarized Condenser

Connectors : 3-Pin XLR 48V Phantom Power with Impedance of 200 Ohms

Sound Pressure Level(SPL) : 138 DB SPL@ 1% Threshold

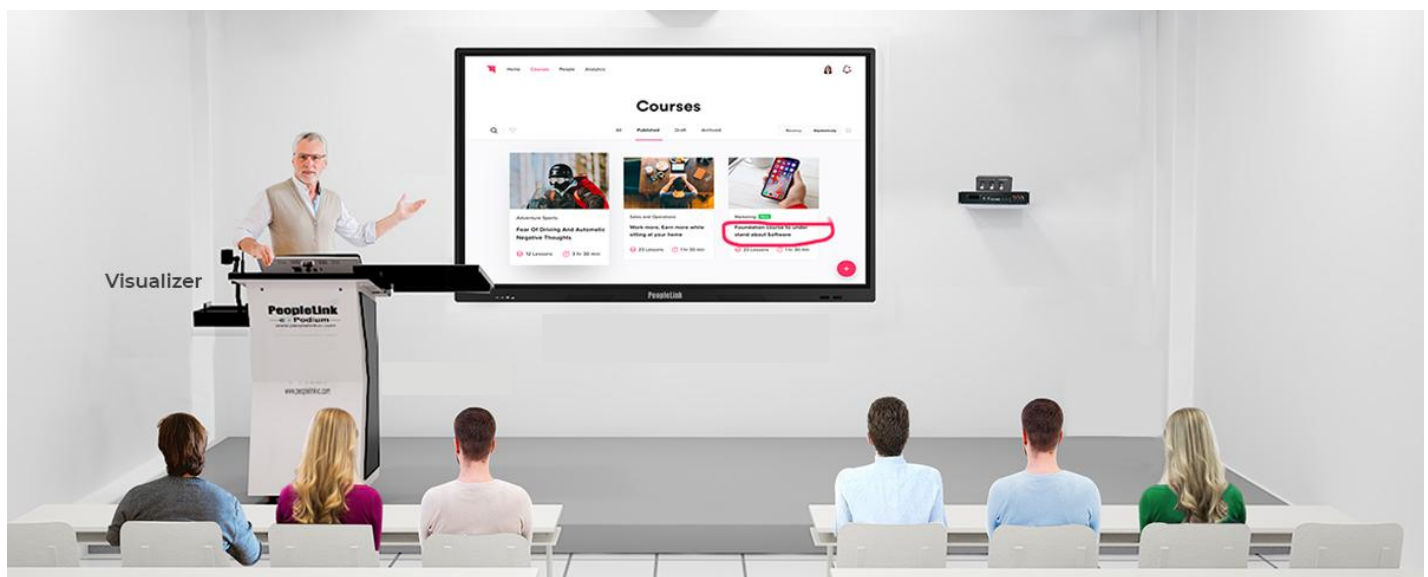

Application Scenarios

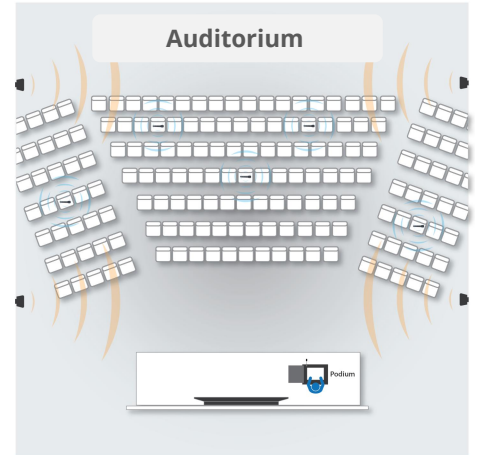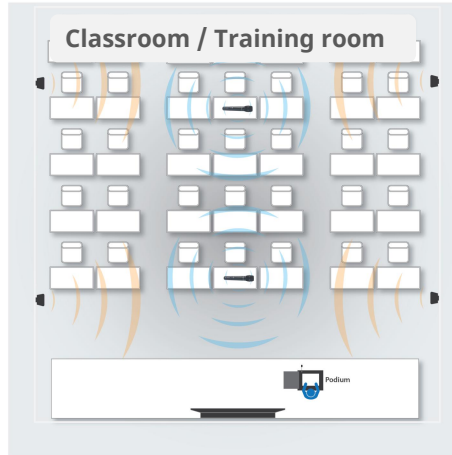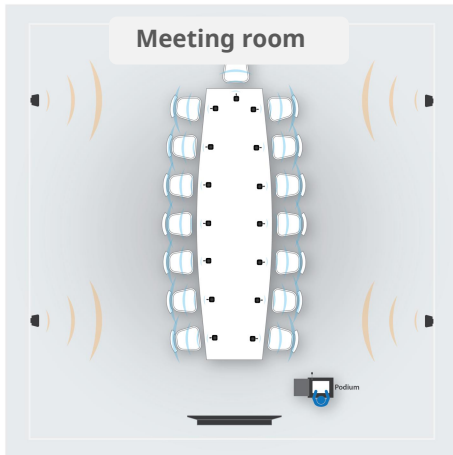

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

Ordering Information

Part code : **PCU-PDP-EP-DELTA PLUS**

LEARN MORE

For more information on e-Podium [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: **+91 9100123013**
Email: **vc@peoplelinkvc.com**

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 559-002093
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 722 619 314

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com