



V 1.0 - 032024

PeopleLink e-Podium Elite



PeopleLink ePodium Elite delivers unmatched Interactivity among various digital devices with its ergonomic design which allows you to collaborate with your partners, Customers and business associates with technological ease; it provides great productivity benefits due to its modular form factor, achieving easy mobility of the device

Specifications

Body Material

Body & Top : Metallic

Top Sliding Mechanism : Yes

Provision for Monitor : Yes (upto 22 inches)

Electronic Monitor Lift : Yes

Document Camera Tray : Yes (Sliding Type)

RFID : Optional

Tablet Monitor Features

Screen Size : 21.5" wide LED

Resolution : 1920 x 1080

PC Connection : USB Port

Luminosity : 250 cd/m²

Input : DVI, HDMI

Touch : Finger and Stylus

Stylus Type : Battery Free Pen Number of Colours : 16.7M

Response time : 5ms

Contraste ratio : 1000/1

Operating System : Windows, Linux, Mac.

Electrical

Input Voltage : DC 12V

Power : 100 – 250V AC : 100 – 250V AC.

CPU (Optional)

Processor : Intel i3 / i5

RAM : 4 GB

HDD : 1000 GB

Operating System : Windows 10

Keyboard/Mouse : Yes

General Specifications

Digital Signal Processor

Frequency Range : 30Hz -15000 Hz

Automatic Echo Cancellation : Yes

Automatic Gain Control : Yes

Dynamic Noise Reduction : Yes

Full Duplex : Yes

1x Line Input, 1 x Line Output, 1 x USB Port

Multi Channel Digital Signal Processor

Microphone Options : 1 lapel + 1 Handheld

Frequencies Response : 50 Hz-18000 Hz

Antennas : 2 x 3dBi

Output : Balanced Out x2, Mixed Out x 1

Volume Control : Yes

Amplifier : Yes

Line Input : 1x Balanced, 2 x Unbalanced.

Phantom : Yes (15 V for Balanced Input)

Power output @8 ohms : 50 Watts x2

Minimum impedance : 8 Ohms

Frequency response : 20Hz-20000Hz

Speakers (1Pair): 50 Watts Speaker (1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90-20KHz Frequencyresponse)

Mcc AIO DSP 200W : (Optional)

Central Controller

Ethernet :10/100 Mbps, Full / Half Duplex, IPV4

RS-232 Port : Total 4 dedicated RS-232C Ports. (3-pin 3.81 mm detachable terminal; Bidirectional TTL/RS-232 (0-5 Volts) port with up to 115200 baud rate)

Power : One 3.5 mm DC power jack connector associated with a Power Switch on rear panel; 12 Volt DCpowerinputand 1.5 Amp max current rating

RS-232/IR Hybrid Port : Total 3 RS-232C/IR Ports (3-pin 3.81 mm detachable terminal; Comprises IR/Serial output ports; Bidirectional TTL/RS-232 (0-5 Volts) port with up to 115200 baudratewhenconfigured as serial; One-way IR output when configured as IR Emitter.

Relay Switch Port :Total 10 blocks (each 2-pin 3.81 mm detachable terminal; Comprises normallyopen, Non-Isolated relays; Rated 6 Amp, 230 Volts AC or 110 Volts DC max.

Analog Signal : One 3.5 mm DC power jack connector associated with a Power Switch onrear panel:

12 Volt DC power input and 1.5 Amp max current rating

Operating Temperature :50° to 113° F (10° to 45° C)

Humidity: RH Non-Condensing 15% to 85%. **Heat Dissipation:** 45 BTU/hr

Gooseneck Microphone Features: (Optional)

Cartridge : 20mm Condenser

Frequency Response : 40~20000 Hz.

Polar Pattern : Cardioids

Connectors : 3-Pin XLR

Control Pad

Control Pad : 7 Inches Touch Screen

Resolution : 800 x 480

Interface : WiFi.

Power : 12V / 1A

Size : 7 Inches

Internal Memory : 2 GB

Laptop Interface

Laptop Interface : Inbuilt

Video Port For laptop : 1x VGA, 2x HDMI

Audio Port For Laptop : 1x 3.5mm Stereo Female Port

LAN Port : 1x RJ-45




USB Ports : 4x USB 2.0 Ports, 1X USB 3.0 Ports, 1xUSB (Laptop Touch & DSP), 1xUSB (CPU Touch & DSP)

Power Socket : 3 Pin AC 220 Power Socket

RS-232 Port : Yes

Video Ports : 4 Ports, 2 x Laptop, 1 x PC, 1 x Visualiser
Switcher : in-built

Application Scenarios

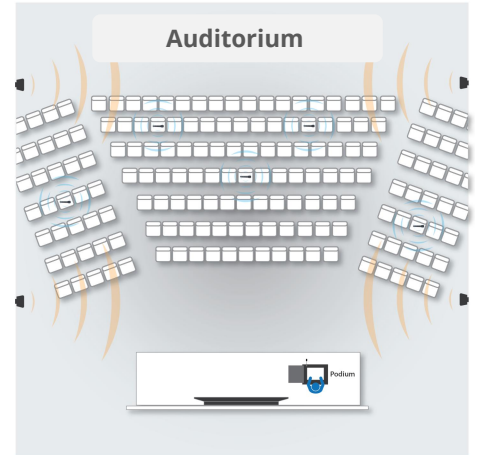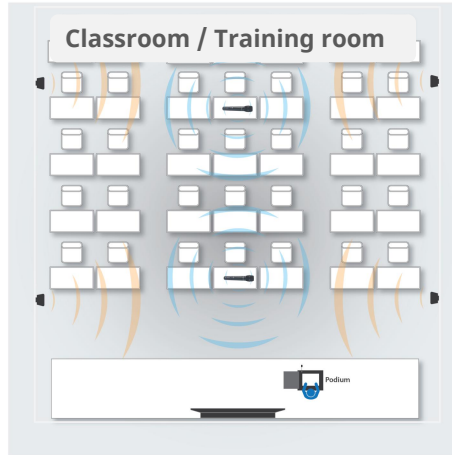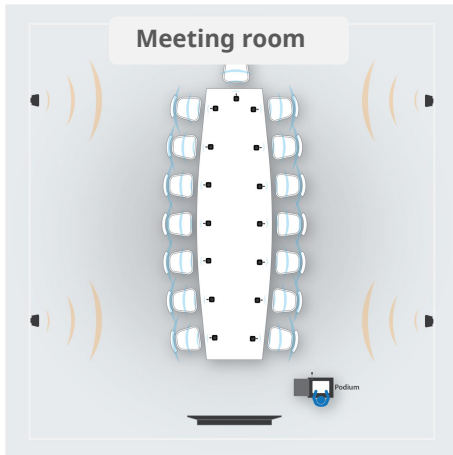

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.



Ordering Information

Accessories

PeopleLink e-Podium Elite

PeopleLink e-Podium Elite 200 (With MCC AIO DSP 200W)

- : 1.5 Mtrs HDMI Cable x4, 3.5mm Male to Male x 2, Stereoto2RCAx 2, USB 2.0 M to M x4.
- : **PCU-PDP-EP-ELITE**
- : **PCU-PDP-EP-ELITE200**

LEARN MORE

For more information on e-Podium [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: **+91 9100123013**
Email: **vc@peoplelinkvc.com**

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 559-002093
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 722 619 314

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com