



V 1.0 - 032024

## PeopleLink e-Podium Ultra



PeopleLink ePodium Ultra delivers seamless interactivity among various digital devices with its ergonomic design which allows you to collaborate with your partners, customers and business associates with technological ease; it provides great productivity benefits due to its modular form factor, achieving easy mobility of the device

## Specifications

### Body Material

Body : Metallic

Top : Metallic

Top Sliding Mechanism : Yes

Provision for Monitor : Yes (upto 22 inches)

Electronic Monitor Lift : Yes

Document Camera Tray : Yes (Sliding Type)

RFID : Optional

### Tablet Monitor Features

Screen Size : 21.5" wide LED

Resolution : 1920 x 1080

PC Connection : USB Port

Luminosity : 250 cd/m<sup>2</sup>

Input : HDMI

Number of Colours : 16.7M

Response time : 5ms Contrast ratio : 1000/1

Operating System : Windows, Linux, Mac.

### Electrical

Input Voltage : DC 12V

Power : 100 – 250V AC : 100 – 250V AC.

## General Specifications

### Digital Signal Processor

**Frequency Range** : 30Hz -15000 Hz  
**Automatic Echo Cancellation** : Yes  
**Automatic Gain Control** : Yes  
**Dynamic Noise Reduction** : Yes  
**Full Duplex** : Yes  
**Line Input** : 1x Line Input  
**Line Output** : 1 x Line Output  
**USB Audio Port** : 1 x USB Port

### Multi Channel Digital Signal

Package Includes

**Microphone Options** : 1 lapel + 1 Handheld  
**Frequencies Response** : 50 Hz-18000 Hz  
**Antennas** : 2 x 3dBi  
**Output** : Balanced Out x2, Mixed Out x 1  
**Volume Control** : Yes  
**Amplifier** : Yes  
**Line Input** : 1x Balanced, 2 x Unbalanced.  
**Phantom** : Yes ( 15 V for Balanced Input)  
**Power output @8 ohms** : 50 Watts x2  
**Minimum impedance** : 8 Ohms  
**Frequency response** : 20Hz-20000Hz  
Speakers ( 1Pair): 50 Watts Speaker ( 1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90-20KHz Frequencyresponse)

### Central Controller

**Ethernet** : 1x RJ-45  
**RS-232 Port** : Total 1 dedicated RS-232 Port  
**Relay Switch Port** : Screen Up/Screen Down ( 2 Nos)

### Gooseneck Microphone Features: (Optional)

**Cartridge** : 20mm Condenser  
**Frequency Response** : 40~20000 Hz.  
**Polar Pattern** : Cardioids  
**Connectors** : 3-Pin XLR

### Control Pad

**Type** : Buttonpad  
**Interface** : RS-232

Power : 12V

Size : N/A

Type: Buttonpad with Buttons: VGA, HDMI, PC, Screen up/ Screen Down, Projector Lift up, Projector Lift Down, MicMute/Unmute, Volume Mute/Unmute, Volume Up/Down.

### Laptop Interface

Laptop Interface : Inbuilt

Video Port For laptop : 1x VGA, 2x HDMI

Audio Port For Laptop : 1x 3.5mm Stereo Female Port

LAN Port : 1x RJ-45

USB Ports : 4x USB 2.0 Ports, 1X USB 3.0 Ports, 1xUSB ( Laptop Touch & DSP), 1xUSB ( CPU Touch & DSP)

Power Socket : 3 Pin AC 220 Power Socket

RS-232 Port : 1X 3 Pin RS-232 Ports, 1 x 9 Pin RS-232 Port.

Video Input Ports : 2 HDMI x Laptop, 1 HDMI x PC, 1 HDMI x Visualiser Switcher : Inbuilt 4 HDMI Input, 2 HDMI Output, 1 VGA Output

### CPU(Optional)

Processor : Intel i3 / i5




RAM : 4 GB

HDD : 1000 GB

Operating System : Windows 10

Keyboard/Mouse : Yes

## Application Scenarios

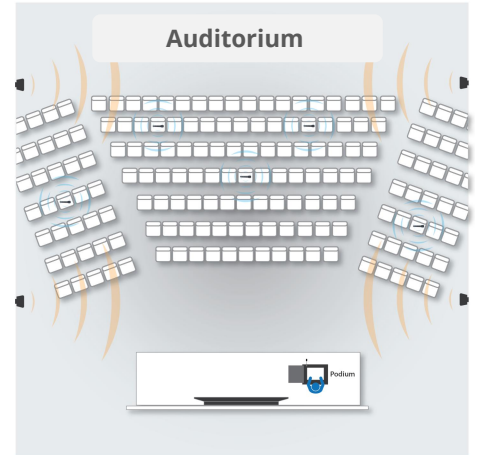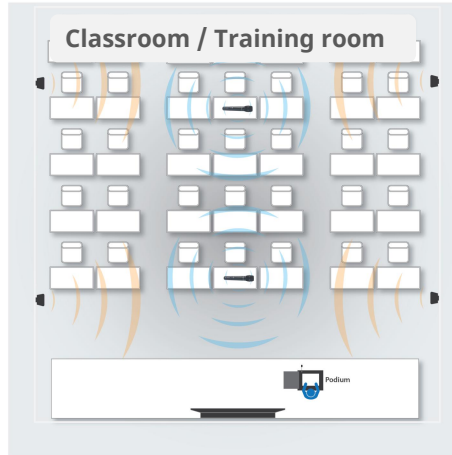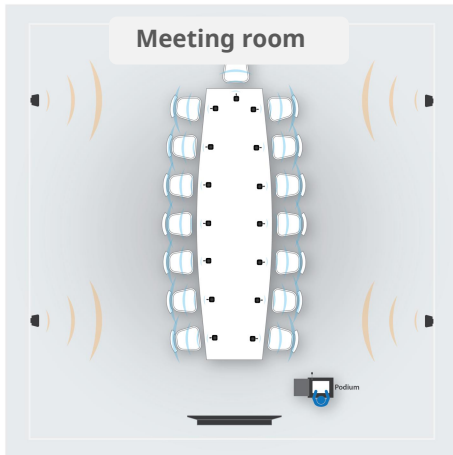

**Disclaimer:-** Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.



## Ordering Information

- Accessories** : 1.5 Mtrs HDMI Cable x2, 3.5mm Male to Male x 1, 1.5 mtrs USB 2.0 M to M x4.
- Part code** : **PCU-PDP-EP-ULTRA**

**LEARN MORE**

For more information on e-Podium [Click Here](#)

## SALES AND INQUIRIES

### Global Headquarters

Q3-A3, 10th Floor Cyber Towers,  
HITEC City, Hyderabad,  
Telangana 500081, **India**  
Phone: **+91 9100123013**  
Email: **vc@peoplelinkvc.com**

### International Contact Numbers

**USA:** +1 669-696-8383  
**Australia:** +61 370 037070  
**France:** +33 6 80 75 26 42  
**Middle East:** +966 5300 19292  
**UK:** +44 20 4571 5454

### Tech Support

**Toll Free:** 1800 208 3399  
customersupport@peoplelinkvc.com